


FP10WALC WITH 4" 125# DISCHARGE (250 GPM)

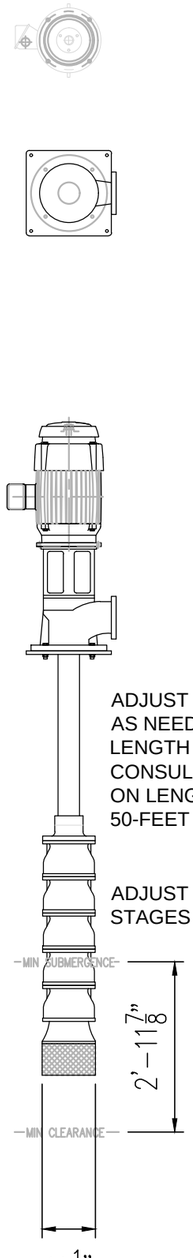


FP11CLC WITH 6" 125# DISCHARGE (500 GPM)

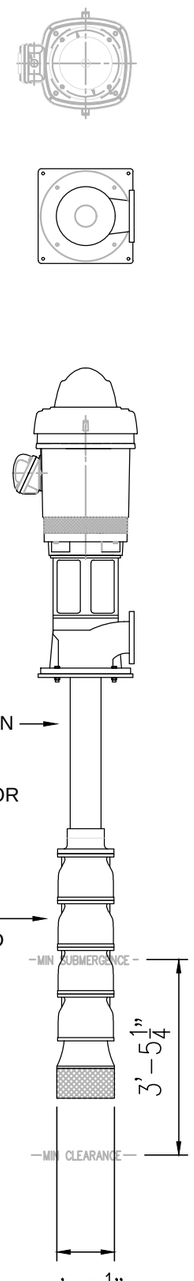


FP11CHC WITH 6" 125# DISCHARGE (750 GPM)

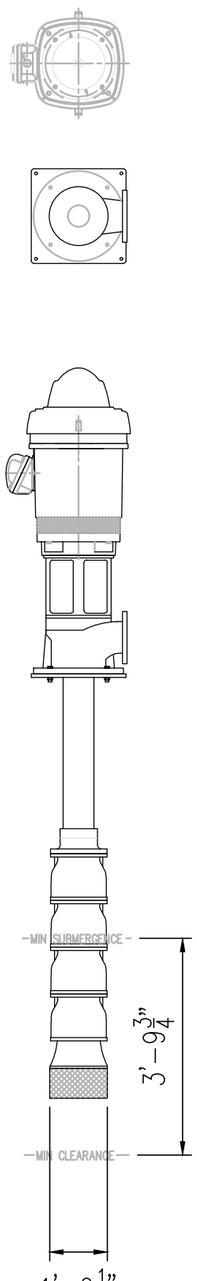


FP12CHC WITH 6" 125# DISCHARGE (1,000 GPM)

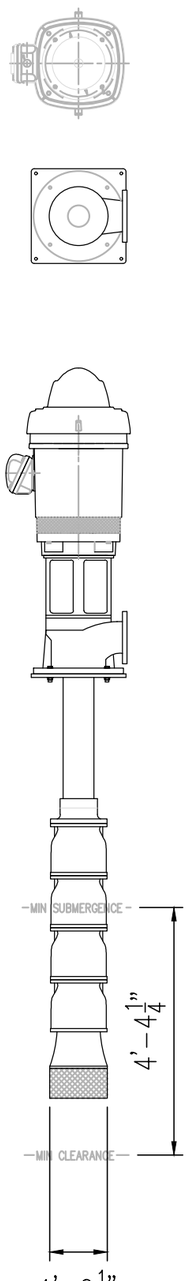


FP14RJHC WITH 8" 125# DISCHARGE (1,500 GPM)

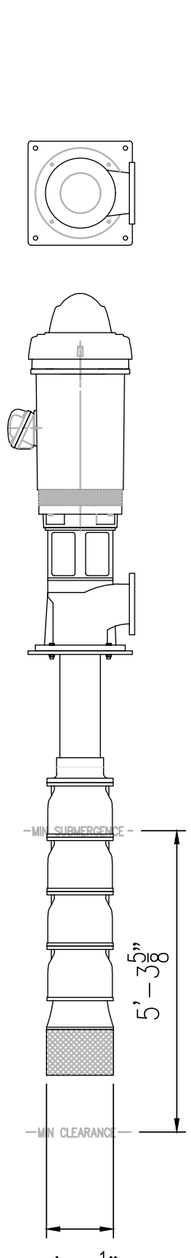

FP14RHHC WITH 10" 125# DISCHARGE (2,000 GPM)

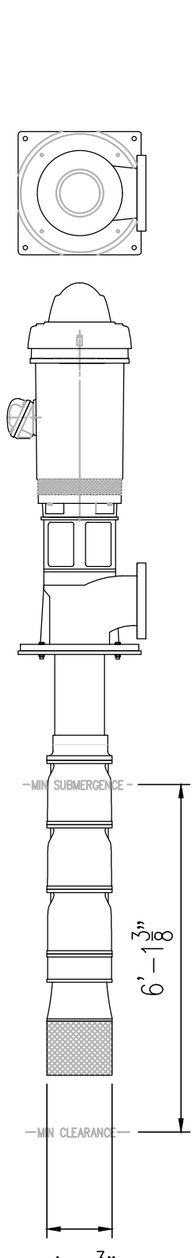

FP16DMC WITH 10" 125# DISCHARGE (2,500 GPM)

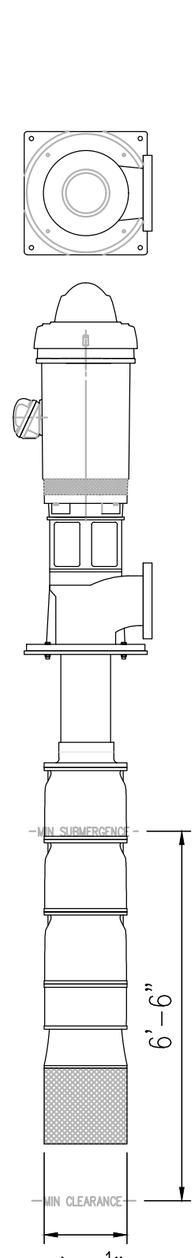

GENERAL NOTES:

1. NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED BY THE FACTOR.
2. MOTOR SHOWN IS A TYPICAL MIDDLE HORSE-POWER RANGE AND NOT DIMENSIONALLY PERFECT. CONSULT ELECTRIC MOTOR MANUFACTURE DATA SHEET FOR SPECIFIC DIMENSIONS.

11 JULY 2019

Anvil Fire
Professional Limited Liability Company
P: 406-624-9408 | F: 406-792-1518 | anvil-fire.com

AC FIRE / XYLEM
VERTICAL TURBINE FIRE PUMP MINIMUM SUBMERGENCE DIMENSIONS

This design and associated documentation is confidential and proprietary to Anvil Fire, PLLC. They shall not be copied or disclosed to others without the express consent of Anvil Fire, PLLC.

SHEET 001 | PLAN VIEW